

PART-3

Technical specification and scope of work for the design & construction of effluent conveyance system and recycle water supply network to the Industries.

1. BACKGROUND:

BIADA has floated tender for the design, construction, supply, Operation & Maintenance of Common Effluent Treatment Plant (CETP). Currently, the industrial units are not well connected with the drain for the transport of industrial & domestic waste water from the industrial unit. Further, the CETP has planned to design based on the concept of Zero Liquid Discharge (ZLD). Hence, there is plan to recycle the treated water from the CETP to the Industries located in the Industrial area to reduce the overall demand of the fresh water consumption in the Industrial area and safe disposal of the treated water from the CETP.

Therefore, BIADA is inviting Tender for-

- i. Design, Construction, Laying of effluent collection system (Common Line for domestic and industrial effluent). The conveyance of effluent preferably through gravity / underground / in closed conduit/Pipe line. If required, an intermediate pumping can be given.
- ii. Design, construction, laying of recycle/ treated water (from CETP) supply network to supply the treated water at the door step of industries.

Note: The Operation & Maintenance for 10 years need to be done. The cost for O&M of conveyance system for effluent and treated water pipeline Need to be included with the cost of CETP O&M.

2. Scope of Work:



Following are the scope of work for the design, construction, laying of Effluent Conveyance System and recycle water supply network:

- i. Topographical survey of the Industrial area through total station survey instrument or equivalent. The bidder to submit soft and hard copy of survey report.
- ii. Preparation of contour line. The bidder to submit soft and hard copy of survey report.
- iii. Depiction of road, electrical pole, storm water line, industries, culvert, etc.
- iv. Based on the survey data design of effluent conveyance system. It will consist design of man-hole and complete work for laying, jointing of suitable size and type pipe – line. The bidder has to submit Detailed Project Report in soft and hard copy.
- v. Design of Pump- sump and intermediate pumping station.
- vi. The design should be such that the effluent convey through gravity to extent possible and less number of intermediate pumping stations.
- vii. Similarly, the design of recycle water supply network through pumping and up to the door step of industrial units. The bidder has to submit Detailed Project Report.

- viii. The design flow from each unit should be worked out to arrive economical size of the effluent conveyance pipe line.
- ix. The cost to be quoted based on the size of pipe, material of construction (MOC) of pipe; including pump-sump, intermediate pumping system, intermediate storage required etc.
- x. The effluent from individual industries group, group of industries would be collected in the man- hole of the effluent conveyance system.
- xi. The design should be such that there should not be any flooding, back pressure and mixing of storm water etc.
- xii. O&M for 10 Years.
- xiii. The DPR should be approved by IIT/NIT/Govt. Engineering College/Competent Authority.

A map of Industrial Area is enclosed herewith

INDUSTRIAL AREA AT BHAGALPUR

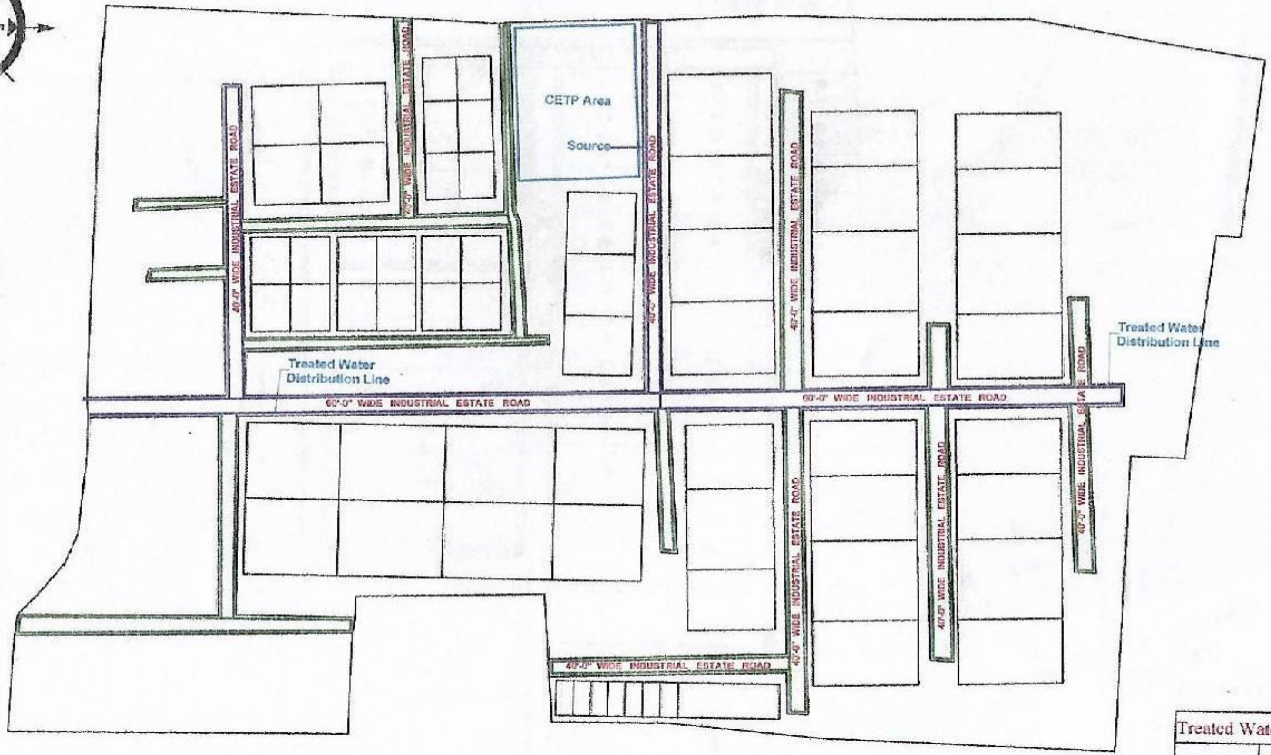

Treated Water Distribution Line	
	Main Line
	Distribution Line

12/2/17
 कार्यपालक अभियंता
 बियाडा, पटना

Bihar Industrial Area Development Authority					
Drawing Name: Layout Plan for Treated Water Distribution Line					
Drawn By:	Scale:	Date:	R.Date:	R.No.:	Sheet No.
D.B.	N/S	14-07-2017	18-07-2017	01	01